

HALF MOON BAY MASTER ASSOCIATION, INC.

7070 Half Moon Circle – Hypoluxo, FL 33462

(Ph) 561547-6243 / (Fx) 561-547-3603

WE HAVE INSTALLED A NEW CALL BOX AT THE ENTRANCE

PLEASE REVIEW THE FOLLOWING RULES:

1. Place the following caller ID number in your phone 386 - 614 - 2530. This number will show on your phone as HMB front gate calling.
2. Your new caller ID will be the same as the old with the **zero added on the end** example if your code was 123 it would now be **1230**, or old 456 new **4560**.
3. Finding the name on the directory you can simply scroll through the entire alphabet.
4. If your guest knows your four-directory number, they can simply touch I have a direct code and enter the **four digits**.
5. On this system entry codes are only for Vendors, Police, Fire and other First Responders, it is not an option for owners or guests.
6. Owners' response to a call: when the condo owner receives a call from the call box you must press **nine** on your phone pad to open the gate this is the same as the old system.
7. Each unit owner will receive **one** decal for each vehicle up to two vehicles (Maximum 2). You must fill out the enclosed sheet (paperwork) and bring a copy of your vehicle registration to the office. Decals will be distributed Monday through Friday from 8 AM till Noon.
8. The old cards will not work, each owner will receive one card.
9. The old clickers /fobs will work provided they are not the first generation those operate as cards and will no longer be valid.
10. Enclosed is a paper on the proper location of the details for your vehicle. And a link to a short video on the use of the system.

<https://www.dropbox.com/s/68gv4z9ebzpbsvj/VID-20200909-WA0002.mp4?dl=0>

Questions and concerns will be handled thru the Master Office.

SYNC



RFID

TAG PLACEMENT INSTRUCTIONS

PLEASE READ FIRST!

Tag placement is critical to a vehicular RFID system. Please follow the directions and handle the tags with care. Consistent tag placement is very important to achieve uniform read range from different vehicles. Tags mounted on different parts of the windshield or headlight will give varying read ranges.

Please follow our recommendations for tag placement.

SR-WND Windshield tag- Please place the tag on the same side of the vehicle as the reader is mounted. When the reader is on the right side of the road as the vehicle approaches, place the tag on the passenger side. When the reader is on the left side of the road as the vehicle approaches, place the tag on the driver side.

- 1) The upper left or right part of the windshield (reader location dependent) will produce the best read range and reliability.
- 2) The tag is to be mounted on the inside of the windshield and the writing should be facing where it is readable and not upside down.
- 3) The tag should be below any tint that is on the windshield.
- 4) The tag should be at least 2" away from any metal.
- 5) Clean the inside of the windshield where the tag is to be placed prior to applying tag. Let the windshield dry if liquid is used.
- 6) Carefully remove tag from the backing.
- 7) Place the tag on the windshield in desired location and apply pressure starting at one end of the tag and finishing at the other. Try to avoid as many air bubbles as possible.
- 8) Do not attempt to remove tag once it is affixed, the tag will be damaged.

SR-HDL Headlamp Tag- Please place the tag on the same side of the vehicle as the reader is mounted. When the reader is on the right side of the road as the vehicle approaches, place the tag on the passenger side. When the reader is on the left side of the road as the vehicle approaches, place the tag on the driver side.

- 1) Do not place the headlamp tag near metal. The tag should be placed towards the middle of the headlight.
- 2) Place the tag horizontally, not vertically.
- 3) Clean the headlight where the tag is to be placed. Let the headlight dry if liquid is used.
- 4) Carefully remove the tag from the backing. Place the tag on the headlamp in desired location and apply pressure starting at one end of the tag and finishing at the other. Try to avoid as many air bubbles as possible.

-Do not try and hold the tag in your hand to gain entry. The tag must be mounted on the windshield or headlamp

-Do not try and scotch tape the tag on the windshield and not use the tag adhesive

-Do not bend or fold the tags

-Do not staple the tags to paperwork


-Do not attach the tags to paperwork with a paper clip

SR-WND

A: Best location for tag if the reader is on the passenger side as approaching. Keep 2" away from any metal and keep below any tinting

B: Best location for tag if the reader is on the driver side as approaching. Keep 2" away from any metal and keep below any tinting

C: Some vehicles have metallic or solar windshields that require tags to be mounted in an area where those elements are removed. If the vehicle has one of these cutouts, the tag must be placed in the cutouts, (cutout location varies, see vehicle manual) or a headlamp tag must be used.

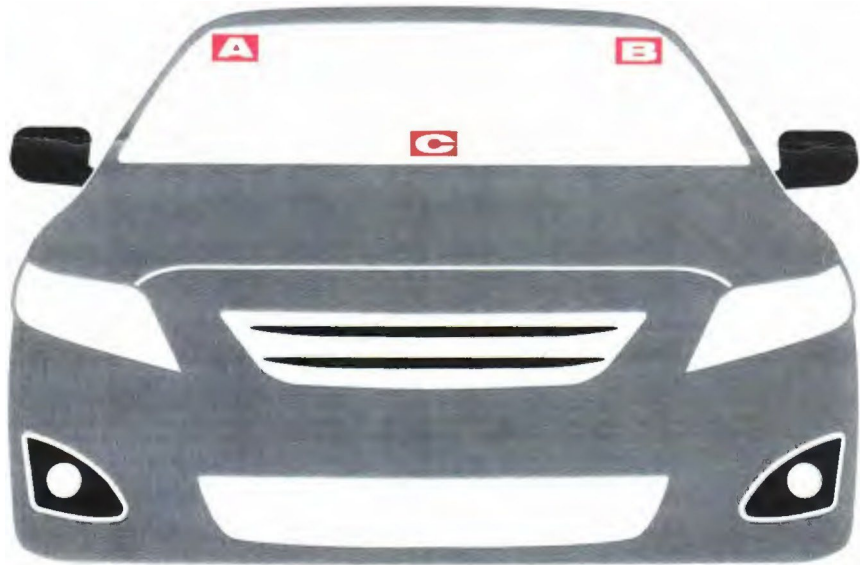

SR-HDL

1: Incorrect placement, the tag is mounted vertically.

2: Incorrect placement, the tag is on the side of the headlight and not facing the reader

3: Incorrect placement, too close to metal

4: CORRECT TAG PLACEMENT

